

XDS100v3 USB CJTAG/JTAG Emulator




Documentation
Installation Guide
[Support](#)

Application
Software Debug

Warranty: 30 days from date of purchase

Part #: 702305

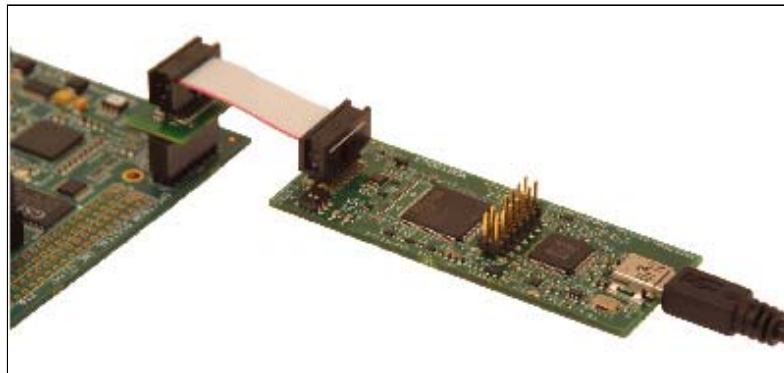

XDS100v3 USB CJTAG/JTAG Emulator

Hardware Features

- Supports Texas Instruments Digital Signal Processors and Microcontrollers with CJTAG / JTAG interface:
 - F28xx • C54xx
 - C674x • C55xx
 - C64x+ • C66x
 - ARM9 • Cortex™
- Supports Embedded Trace Buffer (ETB) on selected TI devices
- USB Bus Powered
- Supports USB 2.0 (480mbps)
- Compatible with +1.8V or +3.3V Interfaces.
- Supports targets with CTI-20 or 14-pin JTAG Header.
- Dimensions: 3.2"L x 1.2"W Low Profile
- RoHS Compliant

Software Features

- Compatible with Code Composer Studio IDE™ from Texas Instruments version v5
- Supports UniFlash™ programming utility from Texas Instruments
- Compatible with Windows XP, Vista, Win7, and Linux Operating Systems

Additional Details

- Current XDS100v3 product details may be found at: [XDS100 Wiki](#)

What's Included

- XDS100v3 USB CJTAG/JTAG Emulator
- USB cable
- 20-pin CTI JTAG extender Cable
- 20-pin CTI to 14-pin JTAG adapter
- Quick Start Guide

You May Need

- Code Composer Studio™