


**ROHS COMPLIANT** 

## PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
Α	DCN 41869	11/15	DAL	

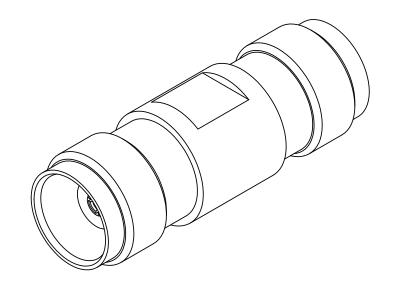

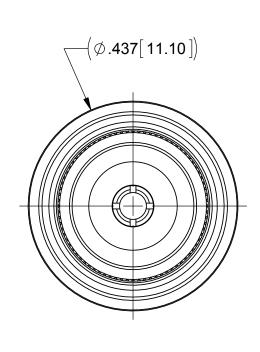

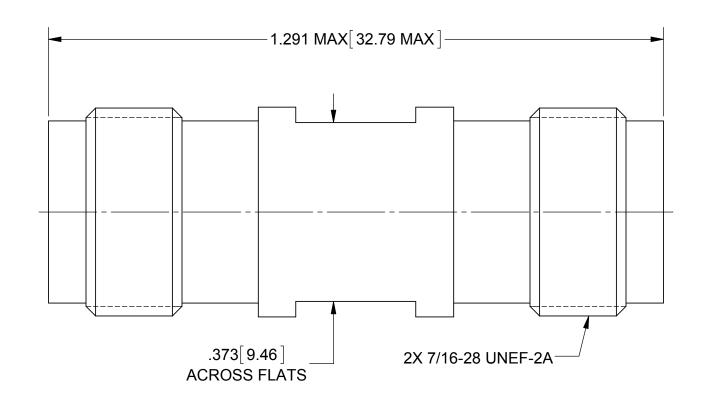

## **MATERIAL:**

BODY: BRASS PER ASTM B16, ALLOY UNS No. C36000

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

**INSULATOR:** PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

SILVER PER ASTM B700, TYPE 1, GRADE G, CLASS S BODY:

CONTACT:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

**PERFORMANCE**:

IMPEDANCE: 50 OHMS

DC TO 18.0 GHz. FREQ. RANGE:

1.30:1 MAX. DC TO 18.0 GHz. VSWR:

	DIMENSIONS ARE IN INCHES TOLERANCES:			
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'			
	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005			
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994				

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63.4ML-STD-10.
6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

THIRD ANGLE PROJECTION	DRAWN:	RPA 11/13/86
	CHECKED:	DAL 11/13/15
	APPROVED:	DAL 11/13/15



TITLE:

TNC JACK TO JACK STRAIGHT ADAPTER

SIZE CAGE CODE DWG. NO. M55339/33-00001 B 95077 SCALE: 5:1 SHEET 1 OF 1